

GENERAL PURPOSE SCALES



SK SERIES

FEATURES

- Five (5) Capacities (2-66 lb)
- Up to 1/5,000 Resolution
- Portable (6 D type Batteries, not included)
- Large, easy-to-read LCD Display (25mm)
- Stainless Steel, Removable Weigh Pan (Quick, easy cleaning)
- Splash & Dust Proof
- NSF Certified - SK and SK-Z Models (Sanitary for Food Processing & Foodservice applications)
- Solid & Reliable Design
- Temperature Compensated (for use near ovens or in refrigerated areas)



SK Series Specifications

Legal-for-Trade (except SK-5001) & basic weighing in lb or kg

| Model | SK-1000 | SK-2000 | SK-5000 | SK-5001 | SK-10K | SK-20K | SK-30K |
|------------------|--|---------------|--------------|----------------|------------------|-----------------|-----------------|
| Capacity | 1000 g/2.2 lb | 2000 g/4.4 lb | 5000 g/11 lb | 5000 g | 10 kg/22 lb | 20 kg/44 lb | 30 kg/66 lb |
| Resolution | 0.5 g/0.001 lb | 1 g/0.002 lb | 2 g/0.005 lb | 1 g | 0.005 kg/0.01 lb | 0.01 kg/0.02 lb | 0.02 kg/0.05 lb |
| Linearity | ± 1 g | ± 2 g | ± 4 g | ± 4 g | ± 0.01 kg | ± 0.02 kg | ± 0.02 kg |
| Display | Liquid Crystal Display, 25 mm/0.98 inch height | | | | | | |
| Pan Size | 230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches | | | | | | |
| Battery Life | 600 hours with Manganese type cells, 1200 hours with alkaline type cells (approximately) | | | | | | |
| Operating Temp. | -10°C ~ 40°C / 14°F ~ 104°F RH less than 85% | | | | | | |
| Weight | 1.6 kg/3.53 lb | | | 1.9 kg/4.19 lb | | | |
| Calibration Mass | 1000 g | 2000 g | 5000 g | 5000 g | 10 kg | 20 kg | 30 kg |
| Power | 6 "D" size batteries or AC adapter (option) | | | | | | |



SK-Z Series Specifications

lb/kg & lb/oz modes (decimal and fractional oz)

| Model | SK-2000Z | SK-5000Z | SK-20KZ |
|------------------|--|----------------------------|----------------------|
| Capacity | 2000 g/4.4 lb/4 lb 6 oz | 5000 g/11 lb | 20 kg/44 lb |
| Resolution | 1 g/0.002 lb/0.1 oz/1/16 oz | 2 g/0.005 lb/0.1 oz/1/8 oz | 0.01 kg/0.02 lb/1 oz |
| Linearity | ± 2 g | ± 4 g | ± 0.02 kg |
| Display | Liquid Crystal Display, 25 mm/0.98 inch height | | |
| Pan Size | 230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches | | |
| Battery Life | 600 hours with Manganese type cells, 1200 hours with alkaline type cells (approximately) | | |
| Operating Temp. | -10°C ~ 40°C / 14°F ~ 104°F RH less than 85% | | |
| Weight | 1.6 kg/3.53 lb | 1.9 kg/4.19 lb | |
| Calibration Mass | 2000 g | 5000 g | 20 kg |
| Power | 6 "D" size batteries or AC adapter (option) | | |




Front
Dual Display
Back

SK-D Series Specifications

Legal-for-Trade Dual Display with lb & kg modes

| Model | SK-1000D | SK-2000D | SK-5000D | SK-10KD | SK-20KD | SK-30KD |
|------------------|--|---------------|--------------|------------------|-----------------|-----------------|
| Capacity | 1000 g/2.2 lb | 2000 g/4.4 lb | 5000 g/11 lb | 10 kg/22 lb | 20 kg/44 lb | 30 kg/66 lb |
| Resolution | 0.5 g/0.001 lb | 1 g/0.002 lb | 2 g/0.005 lb | 0.005 kg/0.01 lb | 0.01 kg/0.02 lb | 0.02 kg/0.05 lb |
| Linearity | ± 1 g | ± 2 g | ± 4 g | ± 0.01 kg | ± 0.02 kg | ± 0.02 kg |
| Display | Liquid Crystal Display, 25 mm/0.98 inch height | | | | | |
| Pan Size | 230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches | | | | | |
| Battery Life | 600 hours with Manganese type cells, 1200 hours with alkaline type cells (approximately) | | | | | |
| Operating Temp. | -10°C ~ 40°C / 14°F ~ 104°F RH less than 85% | | | | | |
| Weight | 1.6 kg/3.53 lb | | | 1.9 kg/4.19 lb | | |
| Calibration Mass | 1000 g | 2000 g | 5000 g | 10 kg | 20 kg | 30 kg |
| Power | 6 "D" size batteries or AC adapter (option) | | | | | |

Dimensions (mm):

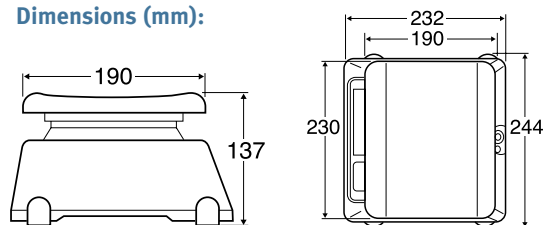

Optional AC Adapters:

- FV-05, 110 volt
- FV-06, 220 volt

Certification:

- NSF-SK & SK-Z Models

Approvals:

- NTEP Class III & Canadian W&M SK and SK-D series (except SK-5001)
- Scale Manufacturer's Association Production Meets Type



COC 98-086
Canada AM-5270