



SD Series

Shipping Scale



75kg and 200kg models available with large platform



The OHAUS SD Series Shipping Scale – Portability, Durability, OHAUS Quality and Value

The SD Series is a robust portable bench scale designed specifically with affordability, utility and every-day usage in mind. Ideal for home office, mail room, shipping and receiving, and general commercial and industrial weighing applications, the SD Series features durable painted steel treaded and non-treaded platforms, a remote indicator with two tactile function keys, battery operation and flexible mounting capabilities. The SD Series is your efficient solution to a variety of weighing needs, when you need it, where you need it.

Standard Features Include:

- 3 popular capacity models: Standard 35kg, 75kg and Large (L) 200kg
- 2 platform sizes: 316 x 280 mm and 520 x 400 mm
- Maximum displayed resolutions from 1:1750 to 1:2200
- ABS plastic indicator housing with reinforced ribs
- Universal table/wall mounting brackets included
- Flexible coiled cable, extendable
- Painted steel base - S models with smooth platform, L models with raised, embossed tread
- Rubber feet (adjustable on L models)
- LCD with fast weight display in kg or lb
- Simple 2 function raised tactile keys
- AC adapter or 360 hour battery operation with Auto-shut off feature
- Calibration in kg or lb
- Carry-handle on carton (non-L models) for ease of portability


SD Series Shipping Scale

Model	SD35	SD75	SD200	SD75L	SD200L
Capacity x Readability	35kg x 0.02kg	75kg x 0.05kg	200kg x 0.1kg	75kg x 0.05kg	200kg x 0.1kg
Maximum Displayed Resolution	1:1750	1:1650	1:2200	1:1650	1:2200
Calibration Weights (fixed)	25kg	50kg	100kg	50kg	100kg
Base Size	316L x 280W x 45H mm			520L x 400W x 75H mm	
Construction	ABS plastic indicator housing and mounting brackets Painted steel base - L models with smooth platform, S models with raised, embossed tread Rubber feet (adjustable on L models)				
Weighing Units	kg, lb				
Application Modes	Weigh, dynamic weighing / display hold				
Linearity / Repeatability	± 1d / 1d (std. dev.)				
Display	1-window, LCD, 20mm high, 4-digit, 7-segment				
Keyboard	2 function raised tactile mechanical switches: [ON/OFF Zero] / [UNITS Cal]				
Stabilization Time	≤ 3 seconds				
Cable Length	Extendable 1.8m / 72" to 2.7m / 108" (full extension)				
Operating Temperature	5° to 40°C / 10%-80% relative humidity, non-condensing				
Power	AC Adapter 9V DC / 100mA or 3 "C" alkaline batteries				
Battery Operating Time	360 hours				
Auto-Shut off	4 minutes with no activity (battery operation only)				
Safe Overload Capacity	150% of capacity				
Indicator Size	210L x 91W x 39H mm				
Shipping Dimensions	380L x 100W x 465H mm			600L x 480W x 230H mm	
Net Weight	2.6kg	3.3kg		14kg	
Shipping Weight	3.7kg	4.3kg		16kg	
Other Features	Calibrate in kg or lb, Calibration lock via internal switch				

Approvals

- **Electrical/Emissions:** Meets requirements of approval agencies: UL/CSA (adapter), FCC, CE Safety EN60950, EMC EN61326
- **Quality:** OHAUS quality management system registered to ISO 9001:2008

Outline Dimensional Drawings

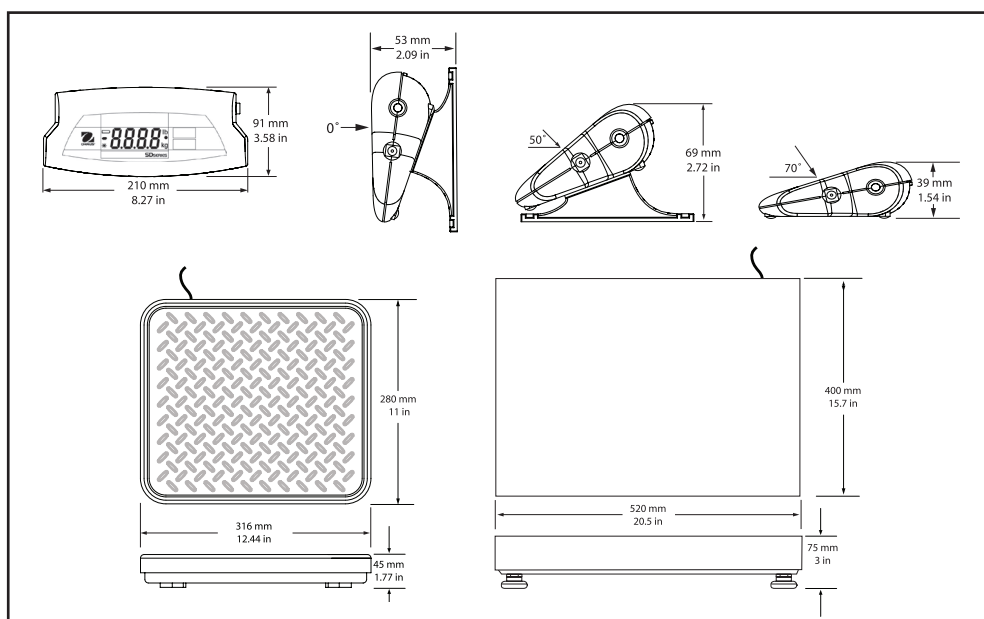

OHAUS Europe GmbH
Im Langacher 44
8606 Greifensee
Switzerland

e-mail: ssc@ohaus.com
Tel: 0041 22 567 53 19
e-mail: tsc@ohaus.com
Tel: 0041 22 567 53 20

www.ohaus.com
With oces throughout Europe,
Asia, and Latin America

ISO 9001:2008
Registered Quality
Management System

