# CS750 Manging Scales

Medium Duty Digital Hanging Scale for Light Industrial Applications



## Durable Hanging Scale Offers Comprehensive Industry Features & Superior Battery Life.


Available in capacities ranging from 100lb (50kg) to 1,000lb (500kg), including NTEP certified models, the durable CS750<sup>TM</sup> Crane Scale boasts an impressive 800 hours of continuous battery life (5,000 hours in stand-by mode), minimizing down time due to battery charging or replacement. The unit can be ordered with or without Fully Integrated RFX<sup>TM</sup> Wireless Weighing Technology and comes standard with an infrared remote control, Crosby eye hook and bottom swivel hook.

The large LCD display with automatic backlight provides easy-to-read weight readings, and a comprehensive set of keypad controls, including Tare and Accum/Total, make CS750™ Crane Scales the go-to solution for light industrial applications. All crane unit electronics are shock-mounted in a weatherproof case and provide maximum protection against moisture, dust and rough usage.



### **CS750™ Hanging Scales**

- 100lb (50kg) to 1,000lb (500kg) Capacities
- Accuracy of ±0.1% of Reading
- NTEP Certified Models Available
- Large, Easy-to-Read, LCD Display
- Features Automatic Backlight, On/Off, Zero, Ib/kg, Tare & Accum/Total
- Commercially Available, D-Cell Batteries (not included)
   Last for up to 800 Hours of Continuous Use, 5,000 Hours in Stand-By Mode
- Available With or Without RFX<sup>™</sup> Wireless Weighing Technology

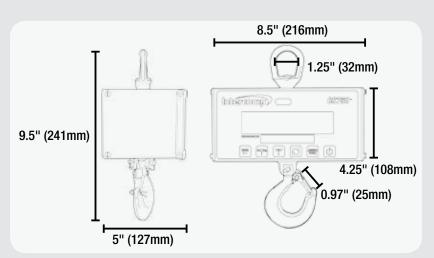





**Bottom Swivel Hook** 

Capacity	Graduation
100lb (50kg)	.05lb (.02kg)
300lb (150kg)*	0.1lb (.05kg)
500lb (250kg)*	0.2lb (0.1kg)

#### \*NTEP Certified Models

#### **Options & Accessories**

1,000lb (500kg)\*

• RS232 Serial Output & Direct Power Connector

0.5lb (0.2kg)

- External Battery Charger
- Direct Power Cable (100-250VAC Supply)
- Serial Output
- Thermal Printer

<b>PERFORMANC</b>	Г
-------------------	---

Accuracy:  $\pm 0.1\%$  of Reading

#### **CONTROLS**

General: Tare, lb/kg, Zero, Mode, Accum/Total & On/Off
Display: LCD
Display Characters: 1" (25mm)

#### **ENVIRONMENTAL**

Humidity: 10 to 95%, Non-Condensing Temperature: -20° to 150°F (-28° to 65°C)

#### ELECTRICAL

Battery: Battery Life:

4 x D-size Alkaline

800 Hours (5,000 Hours in Stand-By Mode)

info@intercompcompany.com

Worldwide: +1 763-476-2531 Toll Free: 800-328-3336 Intercompony.com

